









# Easy Manual




## 1 Edit PLU Manually

*Note 1: If no  in keypad, please press  in sale mode. You succeed if you see “PI”.*

*Note 2: If no  in keypad, please try to find key with symbol like  or .*

### 1.1 Get into PLU Edit Menu

➤ Using “F-Prog”: Press  +  in sale mode (Press and hold , press  without release ).


➤ Normal menu: Press as , , .


### 1.2 PLU Edit


For example: Number=10; Name=Apple; Item Code=12345; Unit Price=12.50/kg; Shelf Day=3 days.

Input PLU number: 10







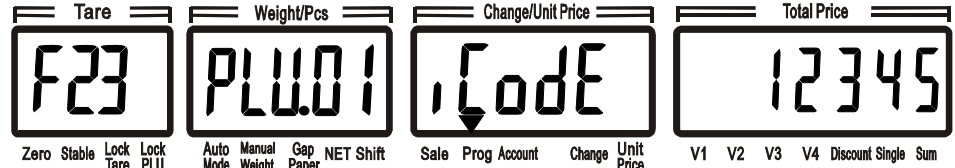

Press  to next step: Item Code menu, Input 12345

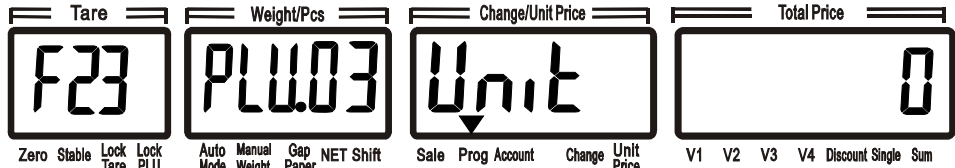




Press  to next step: Unit menu.

Unit 0 or 1 = Default WEIGHT UNIT, 2 = pcs. (Please refer to unit chapter in user manual for detail).




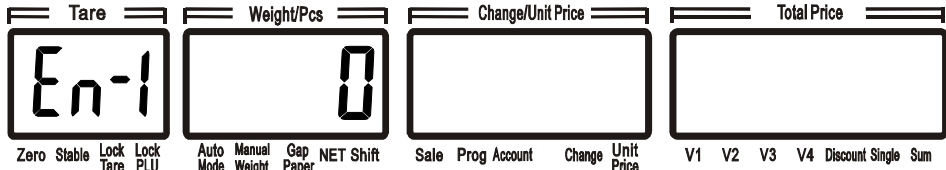
Press  to next step: Unit Price menu, Input .

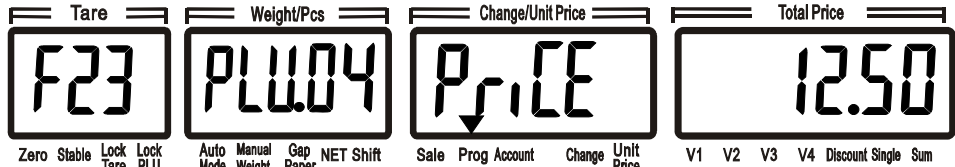



Press  to next step: PLU Name. (If stop in PLU.05 or PLU.06, Press  again)





Press  get into text edit menu of PLU name





Press  to switch Input-Method-Edit: En-1(lowercase), En-2(Uppercase), UTF8(UTF-8), Code(Machine Code). There may be some other IME page in CUSTOM LANGUAGE version.

Press  in right IME page, input character.





Press  to delete redundancy character. Press  to save PLU name.

Press  to next step: Shelf Date Print menu (“0”=not print, “1”=print), Input .


no print = 0, Press  to save PLU)



Press  to next step: Shelf Days menu, Input 3.

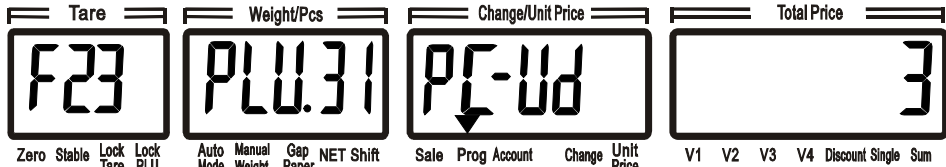

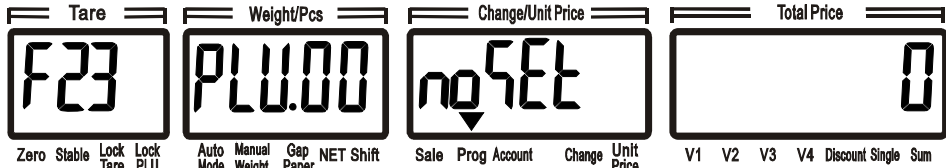




Press  save PLU.






Edit finish, go on edit other PLU or quit.

## 2 Edit PLU Shortcut Key Manually

For example: Edit PLU-10 into ,

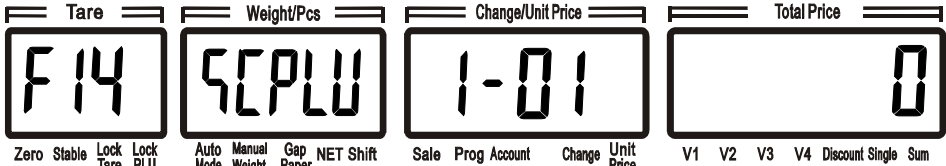
Press  +  in sale mode (Press and hold , press  without release .



Input PLU Number, , Press  to save.


## 3 By-Weight PLU Sale


### 3.1 Zero

Confirm no weight on scale. Check indicator “Zero” light or not. If not light, Press .

### 3.2 Tare

Put container on scale, scale displays weight of container, if it is 0.105kg



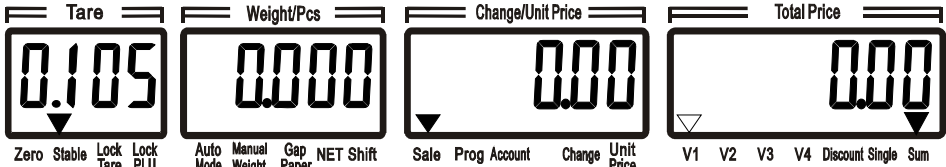


Press , Weight is 0.000, while Tare is 0.105kg.



Remove container, Press  again, Tare back to 0.000.

### 3.3 Transaction of by-weight T-Sale


For example: Unit Price is 15.00.

Input , Press , put on weight, press  to print.


### 3.4 Transaction of exist PLU

For example: PLU number=10, its shortcut key = 1 : a/A, Unit Price=12.50/kg

 or 

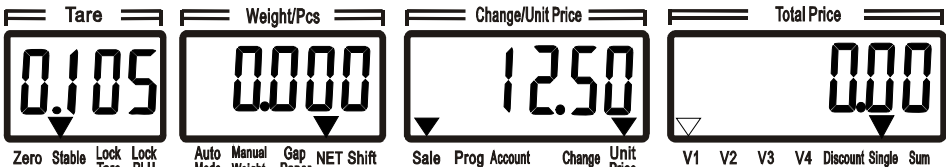

Put weight on scale, If weight = 1.000kg

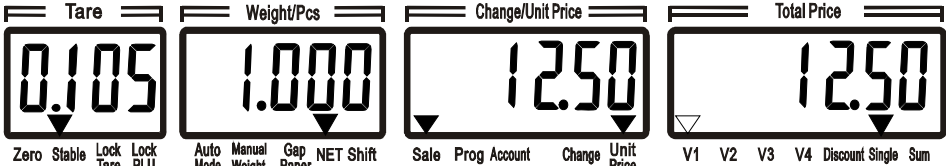

Press  to print.

## 4 By-Count PLU Sale

### 4.1 Transaction of by-count T-Sale

For example: Unit Price = 12.00, 5pcs.

Input Unit Price , Press , press  to print.

### 4.2 Transaction of exist PLU

For example: PLU number=20, its shortcut key = 2 : b/B, Unit Price=2.50/pcs

2

0

PLU

or

b/B

Tare

Zero Stable Lock Tare Lock PLU

Weight/Pcs

Auto Mode Manual Weight Gap Paper NET Shift

Change/Unit Price

Sale Prog Account Change Unit Price

Total Price

V1 V2 V3 V4 Discount Single Sum

×

2

Need 2pcs: Press

Tare

Zero Stable Lock Tare Lock PLU

Weight/Pcs

Auto Mode Manual Weight Gap Paper NET Shift

Change/Unit Price

Sale Prog Account Change Unit Price

Total Price

V1 V2 V3 V4 Discount Single Sum

Cash/Print

Press

to print.

## 5 Change Price Temporary

For example: PLU number=10, default Unit Price=12.50/kg. It changed to 10.00 for this transaction.

Call PLU 

1

0

PLU

, input new price 

1

0

00

, put on weight, press 

Cash/Print

.

Input new price before press 

×

, if by-count PLU called.

## 6 Accumulate and Change

Press 

Accu/Confirm

 instead of 

Cash/Print

 to accumulate.

When all item accumulated, input Cash and then press 

Cash/Print

 to print. Scale displays change.

If no Cash input, scale do not display change.

## 7 Clear Accumulated Item

If you want to cancel the whole bill: Press 

Amend

, and press 

Accu/Confirm

.

If you only want to cancel one item in bill: Press 

Amend

, Press 

↶2

↶4

 to select item, press 

Accu/Confirm

 to cancel this item.

## 8 Quick Modify Unit Price

The function should be open (Refer to Spec83 in 《Definitions of Spec data parameters》)

For example: PLU number=10, default Unit Price=12.50/kg. Now we change it to 11.30/kg.

Call this PLU, 

1

0

PLU

, Display default unit price 12.50.

Tare

Zero Stable Lock Tare Lock PLU

Weight/Pcs

Auto Mode Manual Weight Gap Paper NET Shift

Change/Unit Price

Sale Prog Account Change Unit Price

Total Price

V1 V2 V3 V4 Discount Single Sum

1

1

3

0

@Price

input new unit price

, press and hold

for about 3 second (this key is

-@

in some layout), Unit price saved when you heard 2<sup>nd</sup> short ring

Tare

Zero Stable Lock Tare Lock PLU

Weight/Pcs

Auto Mode Manual Weight Gap Paper NET Shift

Change/Unit Price

Sale Prog Account Change Unit Price

Total Price

V1 V2 V3 V4 Discount Single Sum

0.000

0.000

11.30

0.00

## 9 Edit Spec Parameter

For example: Edit Spec100=1(Open rounding of money)

Please replace 100 and 1 with other number to achieve Spec Edit. Please refer to 《Definitions of Spec data parameters》 in chapter 7.2 in User manual for details.

### 9.1 Get into Spec Edit Menu

➤ Using “F-Prog”: Press 

F-Prog

 + 

Prog

 in sale mode (Press and hold 

F-Prog

, press 

Prog

 without release 

F-Prog

).

➤ Normal menu: Press as 

Prog

, 

1

, 

2

Tare

Zero Stable Lock Tare Lock PLU

Weight/Pcs

Auto Mode Manual Weight Gap Paper NET Shift

Change/Unit Price

Sale Prog Account Change Unit Price

Total Price

V1 V2 V3 V4 Discount Single Sum

F12

5P.000

1

1

This is menu of Spec Edit, “Weight/Pcs” displays SP.000, means it is Spec0 now; “Change/Unit Price” displays original value of Spec0 “Total Price” displays target value of Spec

### 9.2 Edit Spec

Press 

×

, Input Spec number 

1

0

0

, press 

Accu/Confirm

Tare

Zero Stable Lock Tare Lock PLU

Weight/Pcs

Auto Mode Manual Weight Gap Paper NET Shift

Change/Unit Price

Sale Prog Account Change Unit Price

Total Price

V1 V2 V3 V4 Discount Single Sum

F12

5P.100

0

0

Now displays “SP.100”, so it is setting of Spec100, it is 0 original. Input target value 

1

:

Tare

Zero Stable Lock Tare Lock PLU

Weight/Pcs

Auto Mode Manual Weight Gap Paper NET Shift

Change/Unit Price

Sale Prog Account Change Unit Price

Total Price

V1 V2 V3 V4 Discount Single Sum

F12

5P.100

0

1

Press 

Amend

 to save.

## 10 Edit String/Text Parameter

For example: Edit String-0(Store Name) as “xx Market”, String-4(Device Postil 1) to “Phone No: 12345678”.

Get into String Edit Menu, Press as 

Prog

, 

1

, 

3

Tare

Zero Stable Lock Tare Lock PLU

Weight/Pcs

Auto Mode Manual Weight Gap Paper NET Shift

Change/Unit Price

Sale Prog Account Change Unit Price

Total Price

V1 V2 V3 V4 Discount Single Sum

P13

56.000

5XoPn

PV5X-0P

Now, display ST.000, means String-0: Store Name. Refer to <Definitions of String data paremeters> in chapter 7.3 in user manual for detail of strings.

Press 

Accu/Confirm

 get into text edit menu. Input “xx Market”. Press 

End

 to delete redundancy character. Press 

Amend

 to save.

Press 

↶4

 some times until see ST.004, Press 

Accu/Confirm

 get into text edit menu, input ”Phone: 12345678”. Press 

End

 to delete redundancy character. Press 

Amend

 to save.

## 11 Print Report

*Note: If no 

Account

, please press 

Mode

 2 times in sale mode. You succeed if you see “A1”.*

### 11.1 Print Today’s Total Report

Press 

Account

, then press 

Accu/Confirm

 4 times, to print.

### 11.2 Print Today’s List Report

Press 

Account

7

1

, then press 

Accu/Confirm

, to print.

### 11.3 Print Today’s PLU Report

Press 

Account

4

1

, then press 

Accu/Confirm

 2 times, to print.

### 11.4 Clear all report

Press 

Account

5

2

, Input 

9

9

5

8

, 按 

Accu/Confirm

, to clear all report.

## 12 Set Time

Press 

Prog

, 

1

, 

1

 get into Time Edit menu.

Press 

↶2

↶4

 to move cursor, Press number key to input right time. Press 

Amend

 to save.

## 13 Recover Factory Default

**This operation will clear all user information, recover to factory default**, can used to solve some problem caused by unknown operation.

Press 

Prog

5

, Input password (Default is 

2

0

0

8

0

6

), Press 

Accu/Confirm

Press 

2

4

, Input 

9

9

5

8

, Press 

Accu/Confirm

Wait for some second.